

# AMBIUS SECURITY LIGHT RANGE

## SPECIFICATION SHEET

Product Code: ASEC25WMIC

Pronto Code: Q5080690





### TECHNICAL SPECIFICATIONS

- Power: 25W(total) Max. 220-240V 50Hz
- IP54
- 1920 Lumens
- 2-10m detection distance.
- 90° Beam Angle
- Time adjustment: 10sec-12min
- 10-2000 LUX adjustment
- Sensitivity Adj: 100%, 75%, 50%, 25%
- Frosted glass provides glare reduction.
- Adjustable settings using dipswitches
- 1-Year warranty

### INSTALLATION:

- Loosen base plate from the rear of the light.
- Fix the base to the wall in your desire position for the light/sensor using the screws provided (refer to diagram for range options).
- Choose sensitivity, time and lux settings using exposed dipswitches.
- Attach the light to the base – ensure the connection between the two is tight and light is firmly in place.

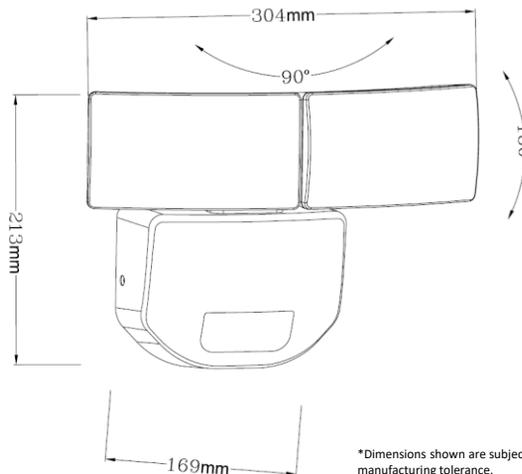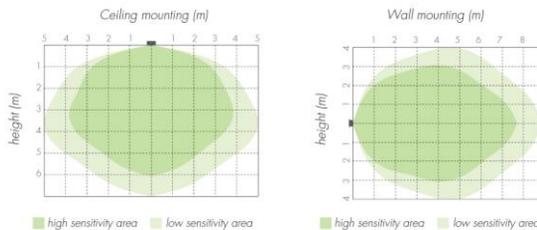

\*Dimensions shown are subject to manufacturing tolerance.



25 Watts



Covered Outdoor



Time On Adjustment



Lux Adjustment



1920 Lumens



112° Beam Angle

25W total Max. Must be installed by a qualified electrician.

Rated IP54, allowing for installation in a covered outdoor area.

Time adjustment:  
Min: 10sec±3sec  
Max: 12min±2min

Ambient light: 10-2000LUX which is adjustable. Use Sun and LUX dials to choose sensor options.

Luminaire output of 1920.

Beam angle of 112 degrees, subject to installation position

Adjustable using dipswitches:

#### SENSITIVITY

	1	2	
A	●	●	100%
B	●	○	75%
C	○	●	50%
D	○	○	10%

#### TIME

	3	4	
A	●	●	5s
B	●	○	90s
C	○	●	5min
D	○	○	15min

#### LUX

	5	6	
A	●	●	Disable
B	●	○	50Lux
C	○	●	10Lux
D	○	○	2Lux

Distributed by:

**CDB**

GROUP

PO Box 100-707  
North Shore Mail Centre  
Auckland

Manufactured to Ambius Lighting's specifications in the PRC.