

Report No.:

Test Time: 2023-08-23 11:33

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: ADLED12W120D-2T Lamp Catalog: 3000K

Luminous Length (mm): 120

Luminous Width (mm): 120

Voltage: 230.1 V

Current: 0.045 A

Power: 9.83 W

Power Factor: 0.950

Photometric Results

CIE Class: Direct

Total Rated Lamp Lumens: 850.3 lm

Measurement Flux: 850.3 lm

Efficiency: 100%

Downward Ratio: 100%

Upward Ratio: 0%

Field Angle(C0/C180,C90/C270,C45/C225,C135/315): 141.6, 141.5, 141.6, 141.6

Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 85.5, 85.4, 85.4, 85.5

Luminaire Efficacy Rating (LER): 86.55

Central Intensity: 429.69 cd


Max. Intensity: 430.61 cd

Pos of Max. Intensity: H0 V1


S/MH(C0/C180): 1.10

S/MH(C90/C270): 1.10

Picture Of Luminaire



Luminous Intensity Distribution Curve

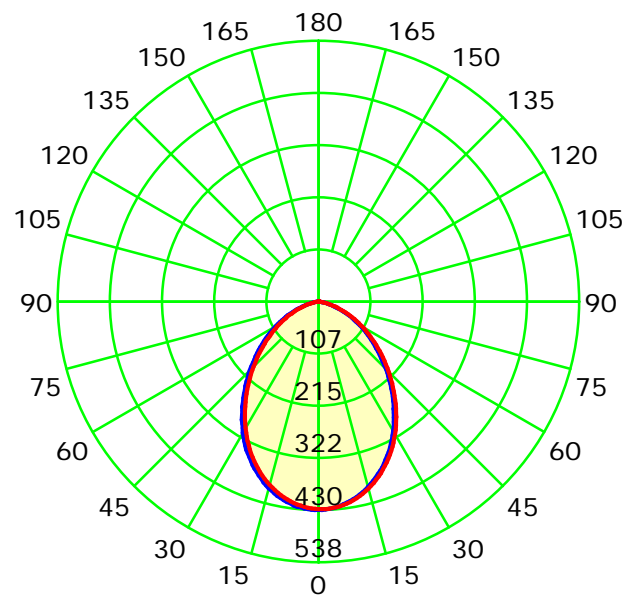

Unit: cd

— C0-C180 — C90-C270

C Plane (°):0.0-360.0: 90.0

Gamma Plane (°):0.0-90.0: 1.0

Test Lab:

Test Device: GPM-1600

Test Type: TYPE C

Distance: 8.350 m



Temperature: 25°C

Humidity: 50%

Operator: XU

Inspector:

Luminous Intensity Distribution Curve

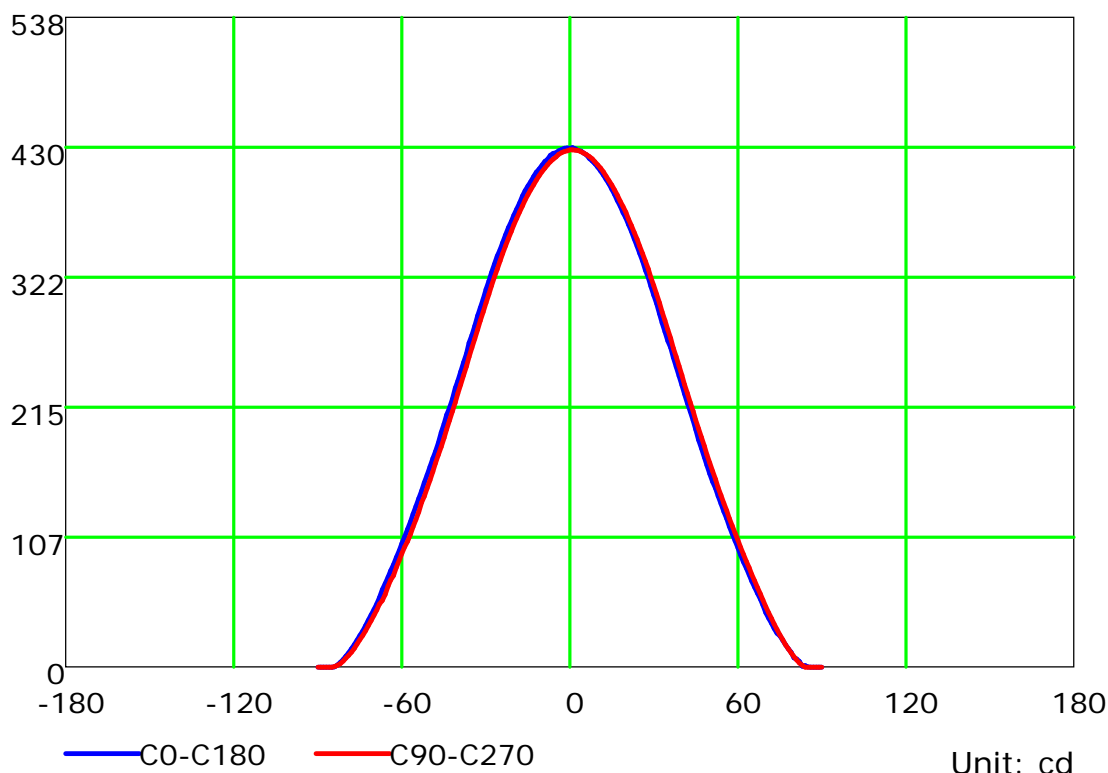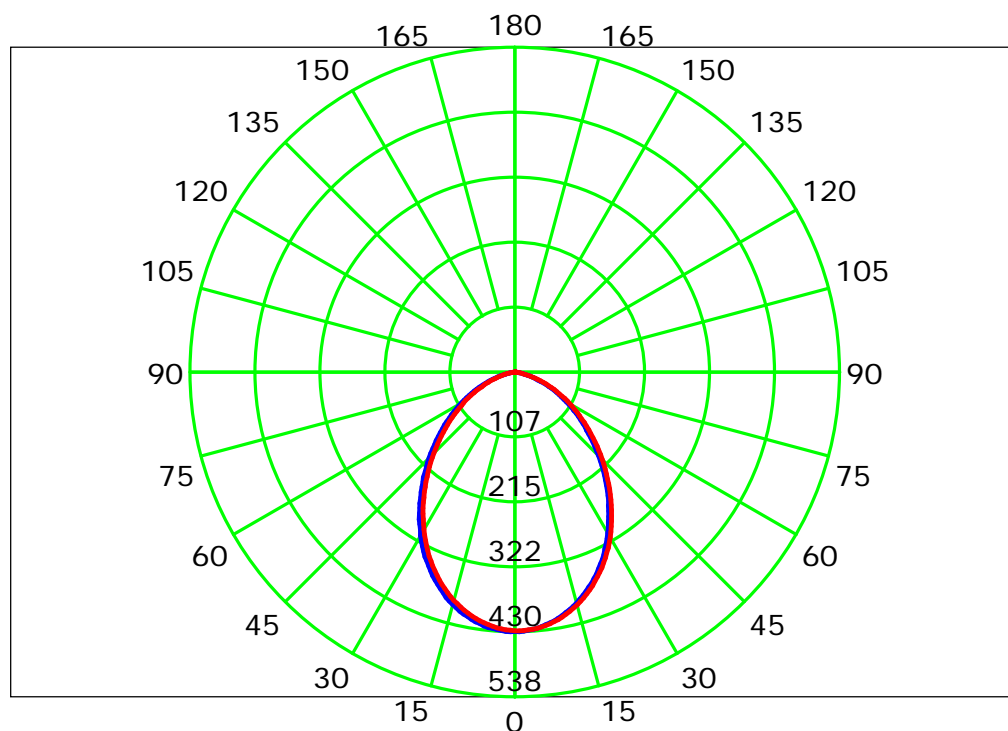

C Plane (°): 0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 25°C
 Operator: XU

Gamma Plane (°): 0.0-90.0: 1.0
 Test Device: GPM-1600
 Distance: 8.350 m
 Humidity: 50%
 Inspector:


Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76
3	94	85	78	72	92	83	77	71	80	75	70	78	73	69	75	71	68	66
4	87	76	68	62	85	75	67	62	72	66	61	70	65	60	68	63	59	57
5	80	69	61	55	78	68	60	54	66	59	54	64	58	53	62	57	53	51
6	75	62	54	48	73	62	54	48	60	53	48	58	52	47	57	51	47	45
7	70	57	49	43	68	56	49	43	55	48	43	53	47	43	52	47	42	40
8	65	52	45	39	64	52	44	39	51	44	39	49	43	39	48	43	38	37
9	61	48	41	36	60	48	41	35	47	40	35	46	40	35	45	39	35	33
10	57	45	37	33	56	44	37	32	43	37	32	43	36	32	42	36	32	30

Spacing Criteria (0-180): 1.10

Spacing Criteria (90-270): 1.10

Spacing Criteria (Diagonal): 1.18

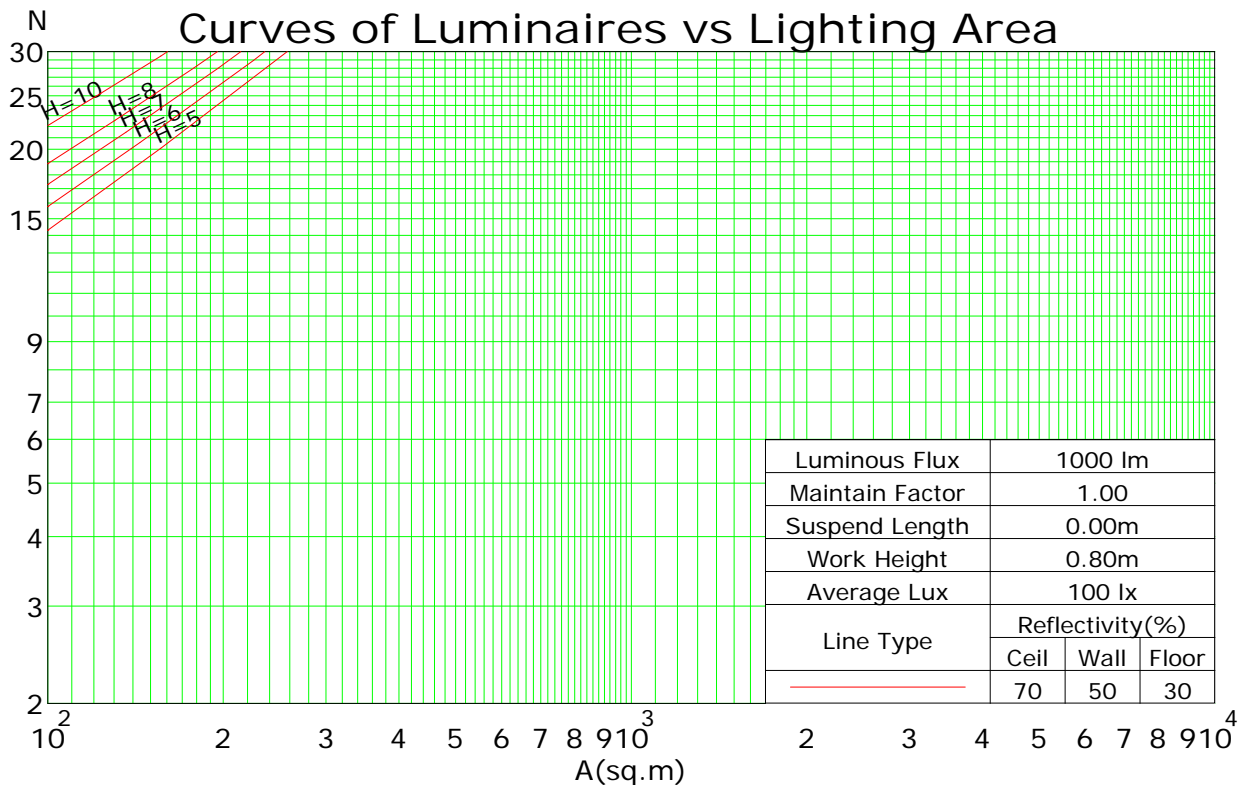

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature: 25°C

Operator: XU

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600

Distance: 8.350 m

Humidity: 50%

Inspector:

Isocandela (rectangle)

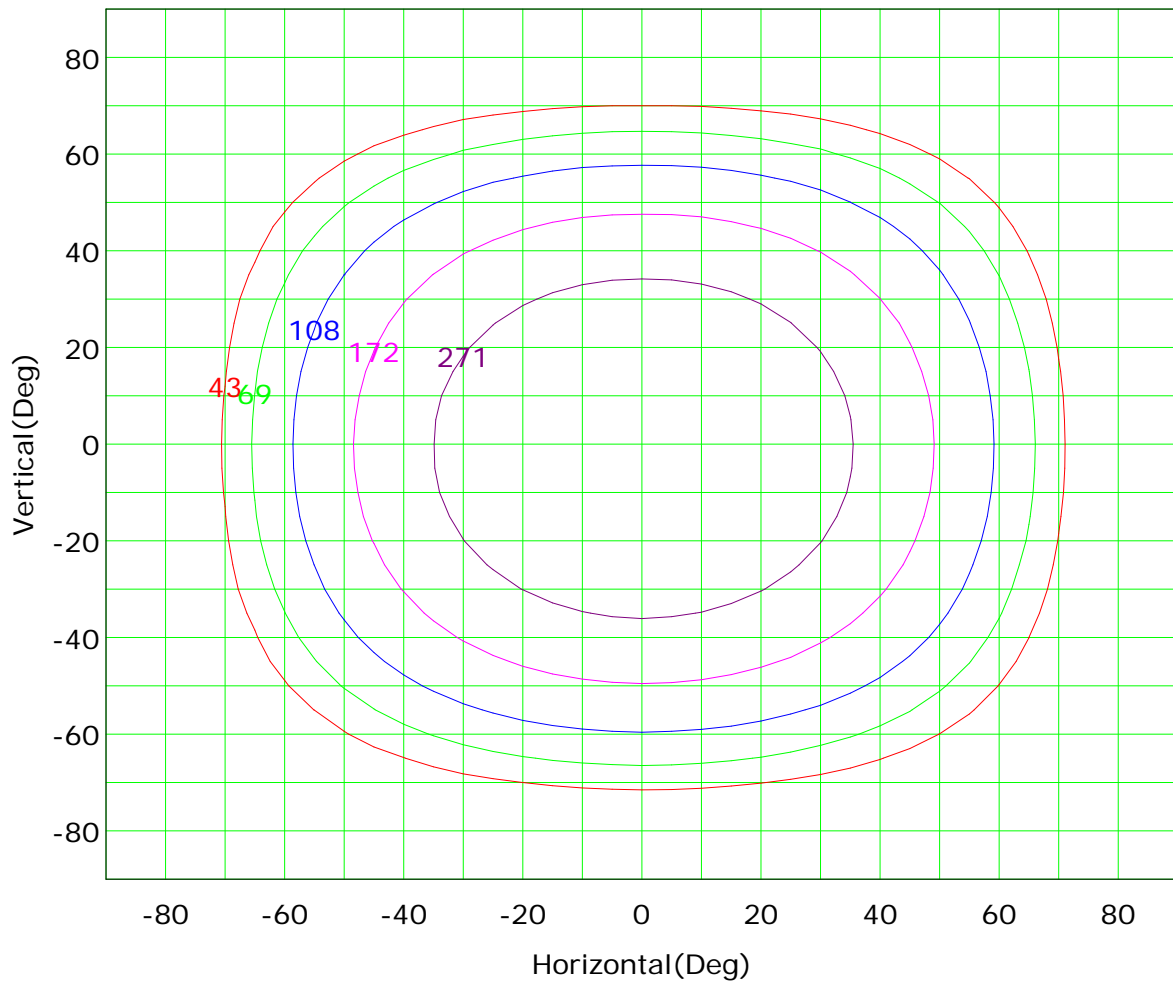


I_{max} (100%): 431 cd

(10%):	43 cd	(16%):	69 cd
(25%):	108 cd	(40%):	172 cd
(63%):	271 cd	(100%):	431 cd

C Plane (°):0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 25°C
 Operator: XU

Gamma Plane (°):0.0-90.0:1.0
 Test Device: GPM-1600
 Distance: 8.350 m
 Humidity: 50%
 Inspector:

IsoLux Plot

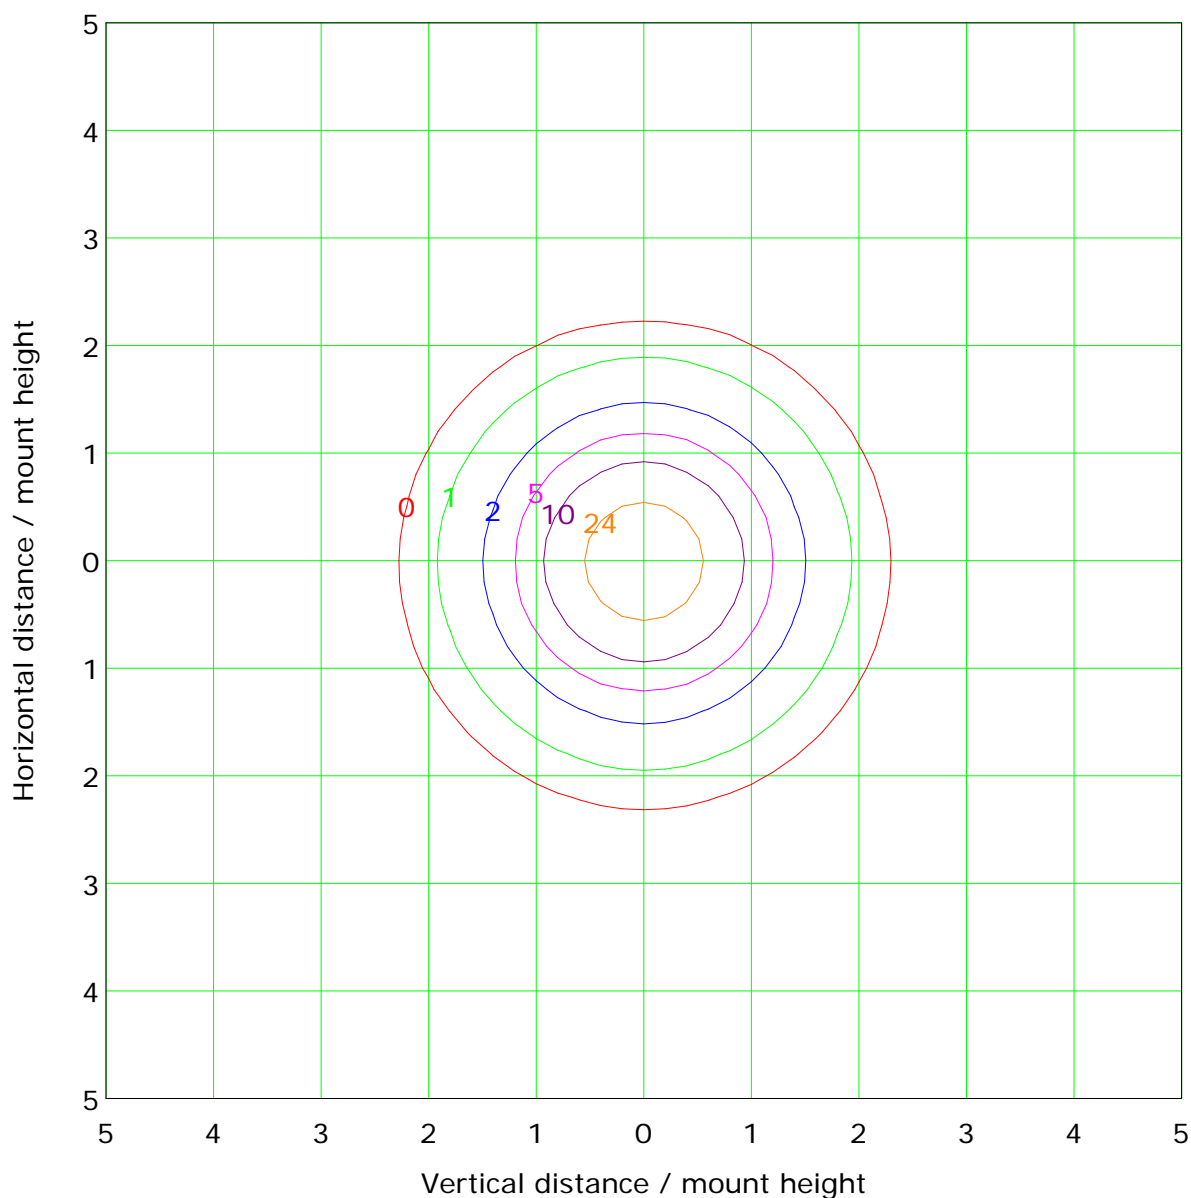

Mounting Height: 3.0m Max Lux(100%): 47.8 lx

(1%): 0.5 lx	(2%): 1.0 lx
(5%): 2.4 lx	(10%): 4.8 lx
(20%): 9.6 lx	(50%): 23.9 lx
(100%): 47.8 lx	



C Plane (°):0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 25°C
 Operator: XU

Gamma Plane (°):0.0-90.0:1.0
 Test Device: GPM-1600
 Distance: 8.350 m
 Humidity: 50%
 Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

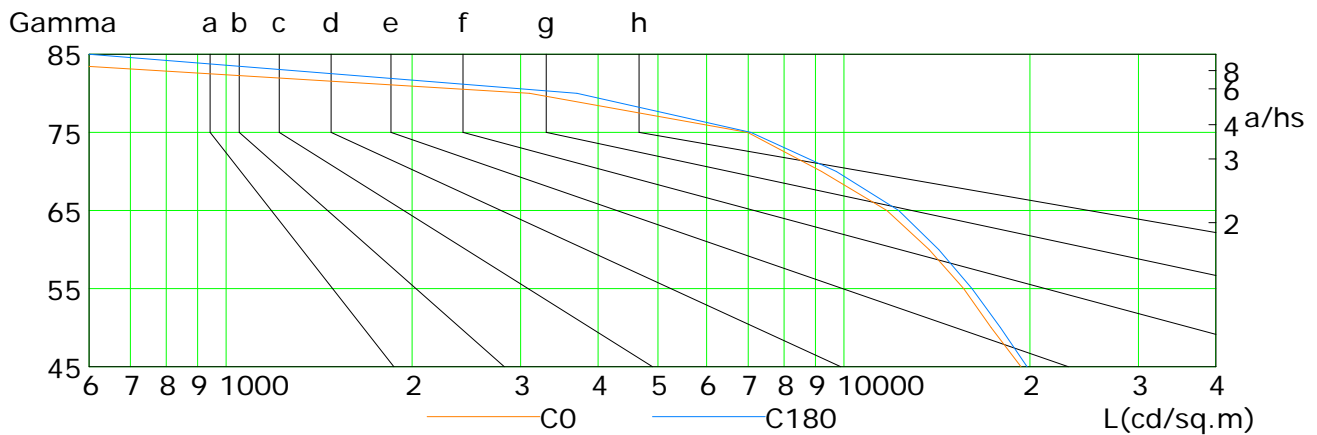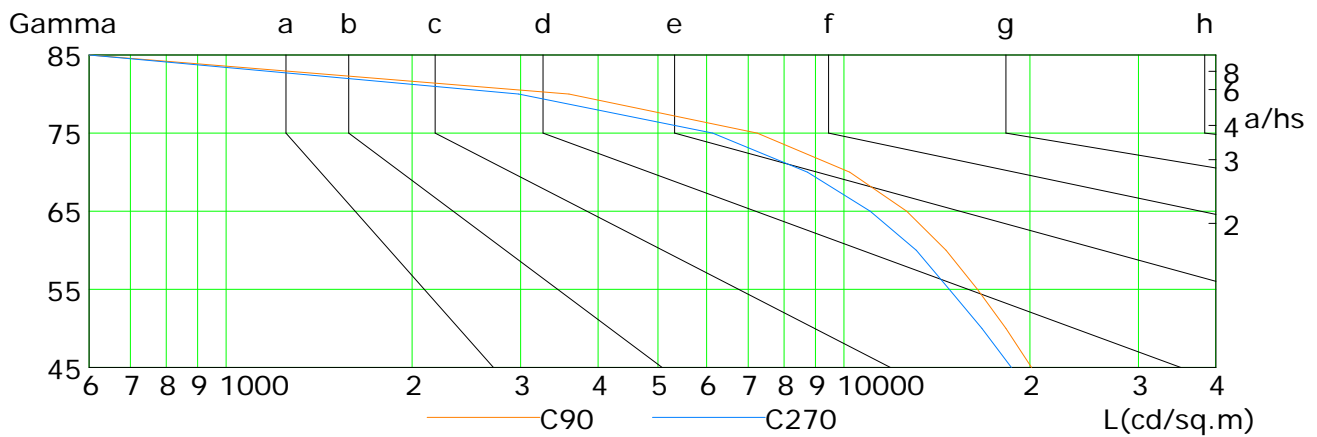


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	19363	17327	15627	13744	11739	9202	6987	3099	287
C90	20120	18302	16459	14631	12639	10221	7239	3591	0
C180	19808	17939	16121	14239	12276	9720	7067	3699	0
C270	18669	16741	14821	13099	11027	8733	6131	2975	0

C Plane (°):0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 25°C
 Operator: XU

Gamma Plane (°):0.0-90.0:1.0
 Test Device: GPM-1600
 Distance: 8.350 m
 Humidity: 50%
 Inspector:


Illuminance at a Distance

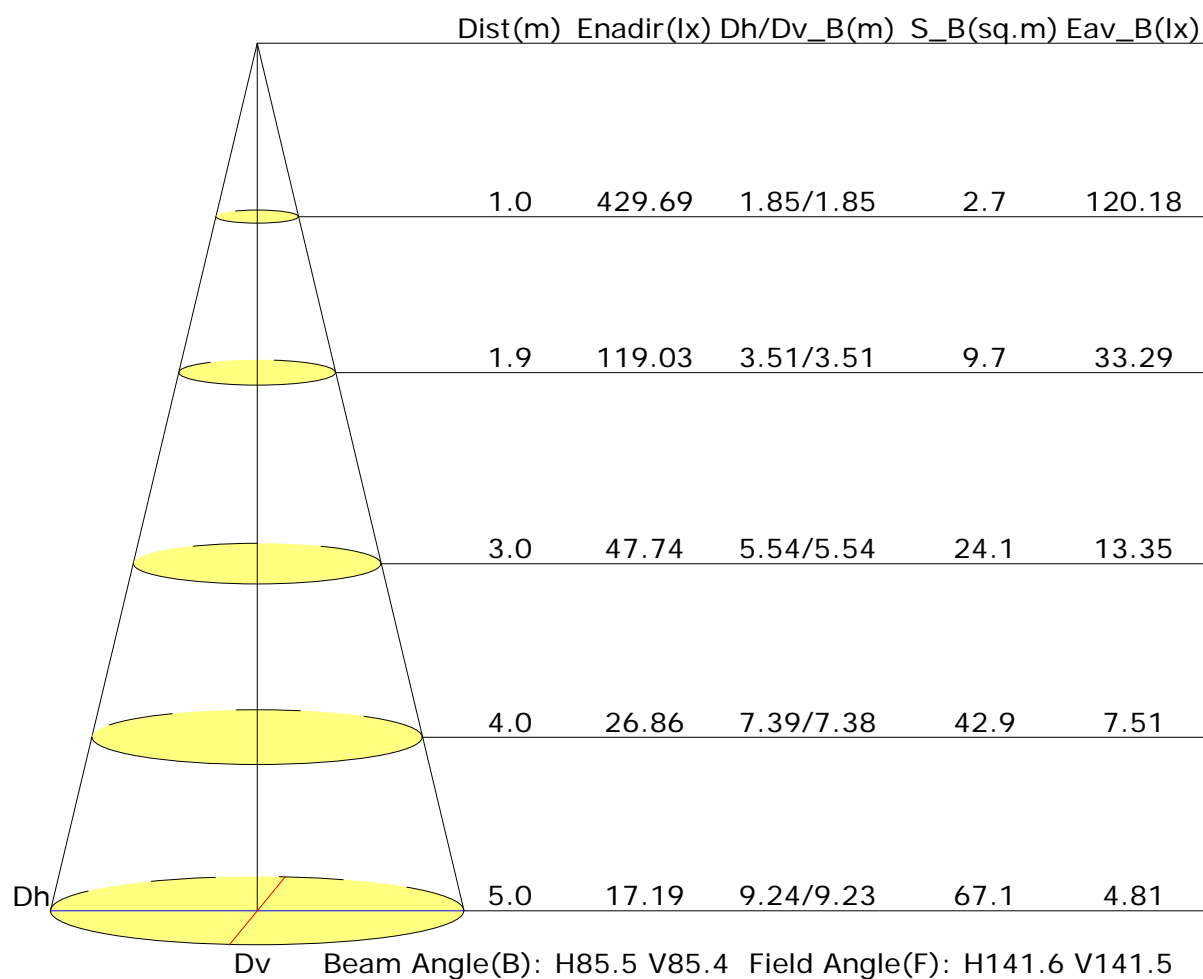

C Plane (°):0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 25°C
 Operator: XU

Gamma Plane (°):0.0-90.0:1.0
 Test Device: GPM-1600
 Distance: 8.350 m
 Humidity: 50%
 Inspector:

Vertical IsoLux Plot

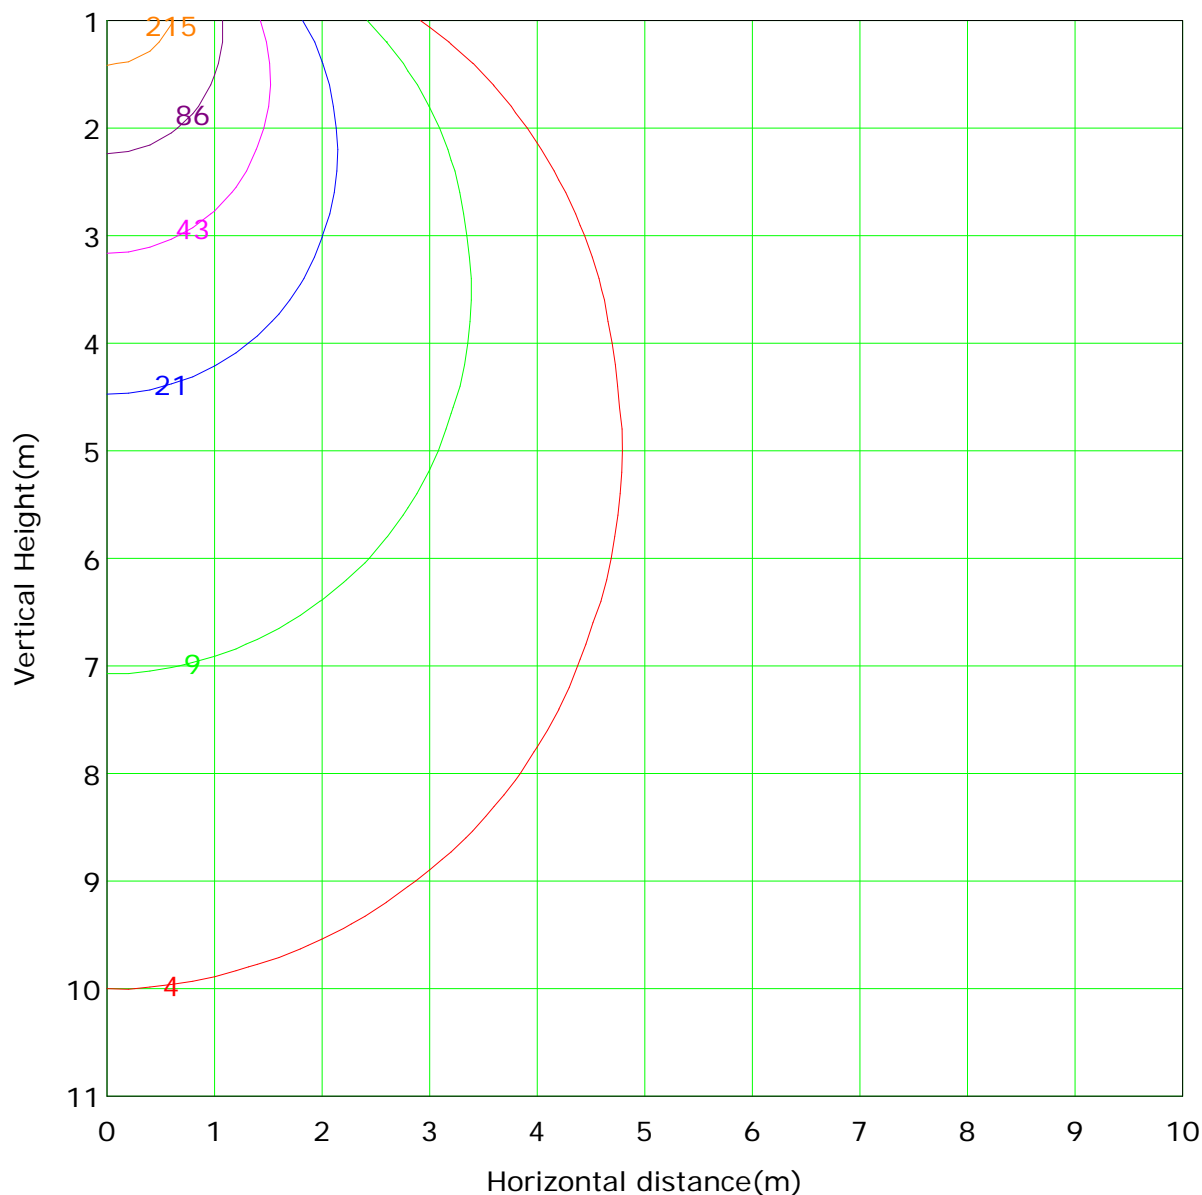

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 429.7 lx

(1%): 4.3 lx	(2%): 8.6 lx
(5%): 21.5 lx	(10%): 43.0 lx
(20%): 85.9 lx	(50%): 214.8 lx
(100%): 429.7 lx	

C Plane (°):0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 25°C
 Operator: XU


Gamma Plane (°):0.0-90.0:1.0
 Test Device: GPM-1600
 Distance: 8.350 m
 Humidity: 50%
 Inspector:

Unit: 1m

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature: 25°C
Operator: XU

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600
Distance: 8.350 m
Humidity: 50%
Inspector:

The Average Illuminance Effective Figure

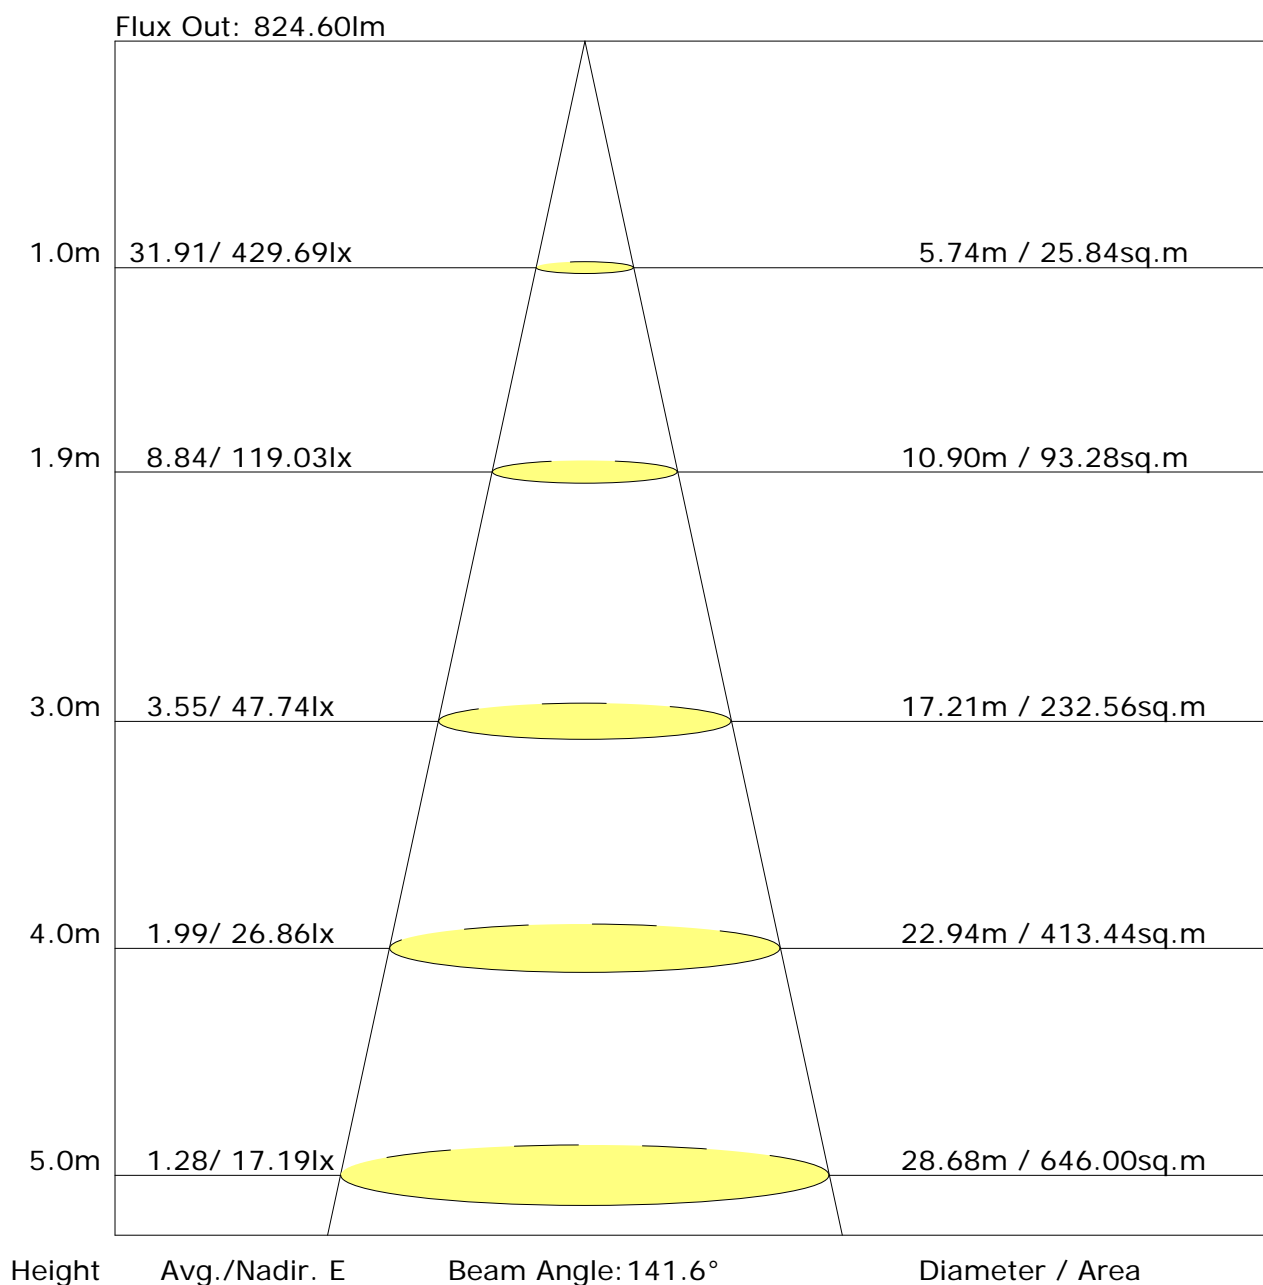

C Plane (°): 0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 25°C
 Operator: XU

Gamma Plane (°): 0.0-90.0: 1.0
 Test Device: GPM-1600
 Distance: 8.350 m
 Humidity: 50%
 Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	21.7	22.9	22.0	23.2	23.4	21.7	23.0	22.0	23.2	23.4
3H	22.5	23.7	22.8	23.9	24.2	22.6	23.7	22.9	23.9	24.2
4H	22.7	23.8	23.1	24.1	24.4	22.8	23.8	23.1	24.1	24.4
6H	22.8	23.8	23.1	24.1	24.4	22.8	23.8	23.2	24.1	24.4
8H	22.8	23.7	23.1	24.0	24.3	22.8	23.7	23.1	24.0	24.3
12H	22.7	23.6	23.1	23.9	24.3	22.7	23.6	23.1	24.0	24.3
X=4H Y=2H	22.1	23.2	22.5	23.5	23.7	22.1	23.2	22.5	23.5	23.8
3H	23.1	24.0	23.5	24.3	24.7	23.1	24.0	23.5	24.4	24.7
4H	23.4	24.2	23.8	24.5	24.9	23.4	24.2	23.8	24.6	24.9
6H	23.5	24.2	23.9	24.6	25.0	23.5	24.2	23.9	24.6	25.0
8H	23.5	24.1	23.9	24.5	24.9	23.5	24.1	23.9	24.5	24.9
12H	23.4	24.0	23.9	24.4	24.9	23.4	24.0	23.9	24.4	24.9
X=8H Y=4H	23.4	24.1	23.9	24.5	24.9	23.5	24.1	23.9	24.5	24.9
6H	23.6	24.1	24.0	24.5	25.0	23.6	24.1	24.0	24.5	25.0
8H	23.6	24.0	24.0	24.5	25.0	23.6	24.0	24.0	24.5	24.9
12H	23.5	23.9	24.0	24.4	24.9	23.5	23.9	24.0	24.4	24.9
X=12H Y=4H	23.4	24.0	23.9	24.4	24.9	23.4	24.0	23.9	24.4	24.9
6H	23.6	24.0	24.0	24.5	24.9	23.6	24.0	24.0	24.5	24.9
8H	23.6	23.9	24.0	24.4	24.9	23.5	23.9	24.0	24.4	24.9
Variations with the observer position at spacings:										
S=1.0H	+0.3/-0.4					+0.3/-0.4				
S=1.5H	+0.5/-1.0					+0.5/-1.1				
S=2.0H	+1.0/-1.7					+1.0/-2.0				

Calculate in accordance with CIE Pub.117. The table is revised with 850lm ($8\log(F/F_0) = -0.6$).

C Plane (°): 0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 25°C
 Operator: XU

Gamma Plane (°): 0.0-90.0: 1.0
 Test Device: GPM-1600
 Distance: 8.350 m
 Humidity: 50%
 Inspector:

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 1.25								
Room Reflectance			Room Index(RI)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.65	0.75	0.82	0.87	0.93	0.97	1.00	1.04	1.07
	0.30		0.58	0.68	0.76	0.81	0.88	0.93	0.96	1.01	1.04
	0.20		0.53	0.63	0.71	0.76	0.84	0.89	0.93	0.98	1.01
0.50	0.50	0.20	0.64	0.73	0.80	0.84	0.90	0.94	0.97	1.00	1.02
	0.30		0.58	0.67	0.74	0.79	0.86	0.90	0.93	0.97	1.00
	0.20		0.53	0.63	0.70	0.75	0.82	0.87	0.90	0.95	0.98
0.30	0.50	0.20	0.62	0.71	0.77	0.82	0.87	0.91	0.93	0.97	0.99
	0.30		0.57	0.66	0.73	0.77	0.84	0.88	0.91	0.94	0.97
	0.20		0.53	0.62	0.69	0.74	0.81	0.85	0.88	0.92	0.95
0.00	0.00	0.00	0.51	0.60	0.66	0.71	0.77	0.81	0.84	0.88	0.90
<p>Rating: 10W Photometrically tested without ceiling board.</p> <p>Multiply UF values by service correction factors</p> <p>Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>											

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 1.25								
Room Reflectance			Room Index(RI)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.87	0.70	0.59	0.51	0.40	0.33	0.28	0.21	0.17
	0.30		0.73	0.60	0.52	0.45	0.36	0.30	0.26	0.20	0.16
	0.20		0.62	0.53	0.46	0.40	0.33	0.28	0.24	0.19	0.16
0.50	0.50	0.20	0.84	0.67	0.56	0.49	0.38	0.35	0.26	0.20	0.16
	0.30		0.71	0.59	0.50	0.44	0.35	0.29	0.25	0.19	0.16
	0.20		0.62	0.52	0.45	0.39	0.32	0.27	0.23	0.18	0.15
0.30	0.50	0.20	0.81	0.65	0.54	0.46	0.36	0.29	0.25	0.19	0.15
	0.30		0.69	0.57	0.48	0.42	0.33	0.28	0.23	0.18	0.15
	0.20		0.61	0.51	0.44	0.38	0.31	0.26	0.22	0.17	0.14
0.00	0.00	0.00	0.50	0.40	0.34	0.29	0.23	0.19	0.16	0.12	0.10
<p>Rating: 10W Photometrically tested without ceiling board.</p> <p>Multiply UF values by service correction factors</p> <p>Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>											

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 1.25									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.15	0.17	0.17	0.18	0.19	0.20	0.20	0.21	0.21	
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19	
	0.20		0.05	0.07	0.08	0.10	0.12	0.13	0.15	0.16	0.17	
0.50	0.50	0.20	0.15	0.16	0.17	0.17	0.18	0.19	0.19	0.20	0.20	
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19	
	0.20		0.05	0.07	0.08	0.10	0.12	0.13	0.14	0.16	0.17	
0.30	0.50	0.20	0.14	0.15	0.16	0.17	0.18	0.18	0.19	0.19	0.20	
	0.30		0.09	0.10	0.12	0.13	0.14	0.15	0.16	0.17	0.18	
	0.20		0.05	0.07	0.08	0.09	0.11	0.13	0.14	0.15	0.16	
0.00	0.00	0.00	NA	NA	NA	NA	NA	NA	NA	NA	NA	
Rating: 10W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	429.2	0.4	0.4	0.05	0.05
1.0-2.0	429.0	1.2	1.6	0.14	0.19
2.0-3.0	428.2	2.0	3.7	0.24	0.43
3.0-4.0	427.3	2.9	6.6	0.34	0.77
4.0-5.0	426.0	3.7	10.2	0.43	1.20
5.0-6.0	424.6	4.5	14.7	0.52	1.73
6.0-7.0	422.9	5.2	19.9	0.62	2.34
7.0-8.0	420.6	6.0	25.9	0.71	3.05
8.0-9.0	418.2	6.8	32.7	0.80	3.85
9.0-10.0	415.7	7.5	40.3	0.88	4.73
10.0-11.0	412.7	8.2	48.5	0.97	5.70
11.0-12.0	409.5	9.0	57.5	1.05	6.76
12.0-13.0	406.1	9.6	67.1	1.13	7.89
13.0-14.0	402.4	10.3	77.4	1.21	9.10
14.0-15.0	398.4	10.9	88.3	1.29	10.39
15.0-16.0	394.2	11.6	99.9	1.36	11.75
16.0-17.0	389.9	12.1	112.0	1.43	13.18
17.0-18.0	385.1	12.7	124.7	1.49	14.67
18.0-19.0	380.0	13.2	137.9	1.56	16.22
19.0-20.0	375.0	13.7	151.7	1.61	17.84
20.0-21.0	369.8	14.2	165.9	1.67	19.51
21.0-22.0	364.4	14.6	180.5	1.72	21.23
22.0-23.0	358.6	15.0	195.6	1.77	23.00
23.0-24.0	352.5	15.4	211.0	1.81	24.81
24.0-25.0	346.5	15.8	226.7	1.85	26.67
25.0-26.0	340.5	16.1	242.8	1.89	28.56
26.0-27.0	333.9	16.3	259.2	1.92	30.48
27.0-28.0	327.1	16.6	275.7	1.95	32.43
28.0-29.0	320.4	16.8	292.5	1.97	34.40
29.0-30.0	313.4	16.9	309.4	1.99	36.39
30.0-31.0	306.1	17.0	326.4	2.00	38.39
31.0-32.0	298.6	17.1	343.6	2.01	40.40
32.0-33.0	291.3	17.2	360.7	2.02	42.42
33.0-34.0	283.9	17.2	377.9	2.02	44.44
34.0-35.0	276.2	17.2	395.1	2.02	46.46
35.0-36.0	269.1	17.1	412.2	2.02	48.48

C Plane (°): 0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 25°C
 Operator: XU

Gamma Plane (°): 0.0-90.0: 1.0
 Test Device: GPM-1600
 Distance: 8.350 m
 Humidity: 50%
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	261.7	17.1	429.3	2.01	50.48
37.0-38.0	253.9	17.0	446.2	1.99	52.48
38.0-39.0	246.4	16.8	463.0	1.98	54.46
39.0-40.0	238.7	16.7	479.7	1.96	56.41
40.0-41.0	231.4	16.5	496.2	1.94	58.35
41.0-42.0	223.9	16.3	512.4	1.91	60.27
42.0-43.0	216.4	16.0	528.5	1.89	62.15
43.0-44.0	209.3	15.8	544.3	1.86	64.01
44.0-45.0	202.1	15.5	559.8	1.83	65.84
45.0-46.0	194.6	15.2	575.0	1.79	67.63
46.0-47.0	187.0	14.9	589.9	1.75	69.38
47.0-48.0	179.8	14.5	604.4	1.71	71.09
48.0-49.0	173.0	14.2	618.6	1.67	72.76
49.0-50.0	166.2	13.9	632.5	1.63	74.39
50.0-51.0	159.3	13.5	646.0	1.59	75.97
51.0-52.0	152.8	13.1	659.1	1.54	77.51
52.0-53.0	146.5	12.7	671.8	1.50	79.01
53.0-54.0	140.0	12.3	684.2	1.45	80.46
54.0-55.0	133.4	11.9	696.1	1.40	81.86
55.0-56.0	127.1	11.5	707.6	1.35	83.21
56.0-57.0	120.9	11.1	718.6	1.30	84.51
57.0-58.0	114.7	10.6	729.2	1.25	85.76
58.0-59.0	108.9	10.2	739.4	1.20	86.96
59.0-60.0	103.2	9.7	749.2	1.15	88.11
60.0-61.0	97.4	9.3	758.5	1.09	89.20
61.0-62.0	91.7	8.8	767.3	1.04	90.24
62.0-63.0	85.8	8.3	775.6	0.98	91.22
63.0-64.0	80.3	7.9	783.5	0.93	92.15
64.0-65.0	75.2	7.4	791.0	0.88	93.02
65.0-66.0	69.7	7.0	797.9	0.82	93.84
66.0-67.0	64.4	6.5	804.4	0.76	94.60
67.0-68.0	59.3	6.0	810.4	0.71	95.31
68.0-69.0	54.4	5.5	816.0	0.65	95.96
69.0-70.0	49.3	5.1	821.0	0.60	96.56
70.0-71.0	44.3	4.6	825.6	0.54	97.10
71.0-72.0	39.7	4.1	829.7	0.49	97.58

C Plane (°): 0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 25°C
 Operator: XU

Gamma Plane (°): 0.0-90.0: 1.0
 Test Device: GPM-1600
 Distance: 8.350 m
 Humidity: 50%
 Inspector:

Zonal Lumen (Continue 2)

[illegible]

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature: 25°C
Operator: XU

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600
Distance: 8.350 m
Humidity: 50%
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	429.7	428.5	429.7	428.5	429.7					
G1.0	430.6	428.6	430.3	427.9	430.6					
G2.0	429.5	428.3	429.8	427.2	429.5					
G3.0	428.2	428.0	428.9	426.2	428.2					
G4.0	427.7	426.9	427.8	424.8	427.7					
G5.0	426.0	426.0	426.3	422.9	426.0					
G6.0	424.3	424.6	425.7	421.0	424.3					
G7.0	421.5	423.0	424.0	418.7	421.5					
G8.0	419.4	421.1	420.7	416.2	419.4					
G9.0	417.2	418.7	419.1	413.5	417.2					
G10.0	414.4	416.3	415.9	410.6	414.4					
G11.0	411.1	413.5	412.7	407.1	411.1					
G12.0	407.7	410.3	410.0	403.5	407.7					
G13.0	404.1	406.8	406.6	399.8	404.1					
G14.0	400.5	403.3	402.3	395.6	400.5					
G15.0	395.9	399.6	398.6	391.5	395.9					
G16.0	391.6	395.2	394.7	386.9	391.6					
G17.0	386.6	391.1	390.4	382.3	386.6					
G18.0	382.3	386.2	384.5	377.3	382.3					
G19.0	376.6	381.7	379.6	371.9	376.6					
G20.0	372.2	376.9	374.4	366.5	372.2					
G21.0	366.9	371.4	369.3	361.0	366.9					
G22.0	361.2	366.0	364.3	355.1	361.2					
G23.0	354.9	360.3	358.0	349.0	354.9					
G24.0	348.7	354.7	351.8	342.8	348.7					
G25.0	343.0	348.8	345.8	336.6	343.0					
G26.0	336.5	342.6	340.7	329.7	336.5					
G27.0	328.8	336.2	333.7	323.0	328.8					
G28.0	322.7	329.9	326.7	316.0	322.7					
G29.0	315.7	322.8	320.0	308.9	315.7					
G30.0	308.3	316.2	313.1	301.7	308.3					
G31.0	301.4	309.1	304.7	294.3	301.4					
G32.0	292.9	301.8	297.6	287.0	292.9					
G33.0	285.5	294.4	291.3	279.8	285.5					
G34.0	278.0	287.2	282.7	272.2	278.0					
G35.0	270.5	279.6	275.1	264.7	270.5					
G36.0	264.7	272.4	268.8	257.0	264.7					

C Plane (°):0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 25°C
 Operator: XU

Gamma Plane (°):0.0-90.0:1.0
 Test Device: GPM-1600
 Distance: 8.350 m
 Humidity: 50%
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	256.7	264.6	259.8	249.4	256.7					
G38.0	249.1	257.3	252.6	242.0	249.1					
G39.0	241.5	249.6	244.8	234.3	241.5					
G40.0	233.9	242.0	237.2	226.7	233.9					
G41.0	226.5	234.4	231.2	219.4	226.5					
G42.0	219.0	227.1	222.1	211.9	219.0					
G43.0	212.0	219.5	214.9	204.7	212.0					
G44.0	204.5	212.3	209.1	197.1	204.5					
G45.0	197.2	204.9	201.7	190.1	197.2					
G46.0	188.4	197.6	194.4	182.7	188.4					
G47.0	181.4	190.4	185.7	175.9	181.4					
G48.0	174.1	183.4	178.5	168.9	174.1					
G49.0	167.5	176.1	173.1	162.1	167.5					
G50.0	160.4	169.4	166.1	155.0	160.4					
G51.0	153.5	162.4	159.3	148.4	153.5					
G52.0	148.3	155.9	152.8	141.6	148.3					
G53.0	142.0	149.0	146.1	136.7	142.0					
G54.0	135.5	142.4	139.9	128.8	135.5					
G55.0	129.1	135.9	133.1	122.4	129.1					
G56.0	123.0	129.7	126.8	116.4	123.0					
G57.0	116.9	123.5	120.5	110.3	116.9					
G58.0	110.7	117.3	114.4	104.3	110.7					
G59.0	104.8	111.2	108.3	99.9	104.8					
G60.0	99.0	105.3	102.5	94.3	99.0					
G61.0	93.3	99.5	96.7	88.6	93.3					
G62.0	87.4	93.7	91.0	83.0	87.4					
G63.0	82.2	88.0	85.1	75.8	82.2					
G64.0	76.8	82.5	80.0	72.1	76.8					
G65.0	71.4	76.9	74.7	67.1	71.4					
G66.0	66.4	71.6	69.4	60.3	66.4					
G67.0	61.4	66.2	64.3	55.3	61.4					
G68.0	56.5	61.0	57.7	52.3	56.5					
G69.0	51.7	55.7	52.6	47.5	51.7					
G70.0	45.3	50.3	47.9	43.0	45.3					
G71.0	40.8	45.3	43.3	38.6	40.8					
G72.0	36.3	40.5	38.7	34.4	36.3					
G73.0	32.2	36.0	34.5	30.2	32.2					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature: 25°C

Operator: XU

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600

Distance: 8.350 m

Humidity: 50%

Inspector:

Candlepower Table (Continue 2)

Unit: cd

[illegible]

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature: 25°C
Operator: XU

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600
Distance: 8.350 m
Humidity: 50%
Inspector: