

DESCRIPTION:

This product is an energy-saving lighting switch. It is a high sensitivity detector with a wide detection range. It activates on human motion, when a person is detected in the field of view the switch is activated and power will be delivered to your light source. This product can identify day and night automatically. It is easy to install and has multiple applications.

SPECIFICATION:


Power Source: 220V/AC-240V/AC	Detection Range: 180°
Power Frequency: 50Hz	Working Temperature: -20~ +40°C
Ambient Light: 10-2000LUX (adjustable)	Working Humidity: <93%RH
Time-Delay: min: 10sec±3sec max: 7min±2min	Installation Height: 1.8m~2.5m
Rated Load: 2000W (incandescent lamp) 1000W (LED lamp)	Power Consumption: 0.9W (working) 0.9W (static)
Detection Distance: 12m max(<24°C)	Detection Moving Speed: 0.6~1.5m/s

FUNCTION:

- Range: The wide detection range includes up and down, left and right, the detection range can be adjusted by changing the orientation of the sensor. The most effective sensing is movement ACROSS the field of view.
- LUX: By turning the sensor to SUN (+), it will work both day and night, when turning it to MOON (-), it will only work when the ambient light is less than 3LUX.
- Time-delay: Once the sensor is triggered, if the sensor continues to be activated by movement it will add a second time delay e.g., first time on delay is 2min, second activation adds a further 2min so the total time on will be 4min. Time-delay is also adjustable; you can choose the length to which the light stays illuminated, the minimum is 10sec±3sec, the maximum is 7min±2min.


INSTALLATION: (as drawing to the right)

- Shut off power.
- Loosen the screw on the base (using flat head screwdriver on the side), open the wiring cavity, feed the mains supply through the base.
- Fix the base with supplied screw to the wall.
- Connect the power and load wire into connection-wire column according to the connecting figure.
- Put the sensor on the bottom lid, twist the screw tightly then electrify it and test it.




CONNECT-WIRE FIGURE:

(See the below figure)

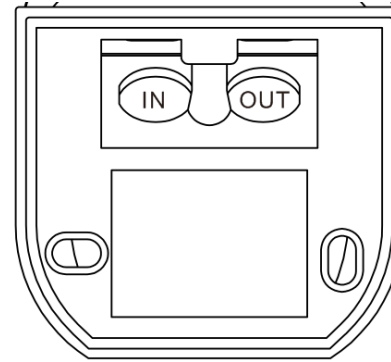

TESTING YOUR SENSOR:

- When testing daylight, set the TIME dial to show the "-" symbol and the LUX dial to show the sun symbol. After 30 seconds the sensor should respond to presence and turn on and then off after the set 10 seconds.
- To set the sensor for the nighttime during the day turn the LUX dial towards the moon symbol and cover the sensor face to simulate darkness.
- To override Sensor Function, quickly switch the power off/on off/on twice at the wall switch (less than 3 seconds). Your light should now be on MANUAL MODE and stay on permanently.
- To change back to AUTO MODE, turn the power OFF and wait for 10 seconds, then turn it back ON again. Please note that at this time the light will turn ON for 10-20 seconds and turn OFF again – at this point it will return to AUTO/SENSOR MODE.

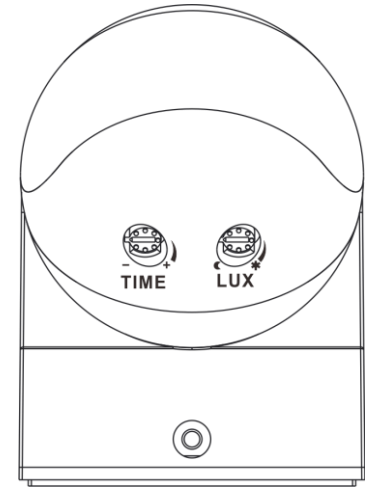

Note: when testing in daylight, please turn LUX knob to ☀ (SUN) position, otherwise the sensor will not work!

NOTE:

- This product should be installed by a licensed electrician.
- Install the object on a solid vertical or horizontal surface.
- Install at least 0.5m away from moving objects, reflective surfaces or other light sources.
- Avoid installing near air temperature zones such as air condition units, central heating, etc.
- If the unit is damaged in any way consult a licensed electrician.

COMMON QUESTIONS:

- The light does not work:
 - a. Ensure the unit has been wired correctly.
 - b. Ensure there is a power supply.
 - c. Check the ambient light setting.
- The sensitivity is poor:
 - a. Ensure there are no obstacles near the sensor.
 - b. Check if the ambient temperature is too high.
 - c. Check the installation height corresponds to the height shown in the instructions.
 - e. Check the sensor orientation.
- The light will not turn off:
 - a. Check if there are obstacles in the detection field.
 - b. Check the time delay setting.
 - c. Ensure the unit is wired correctly.
 - d. Ensure there are no external influences like air conditioning units etc.

AMBIUS

ASECPIRWALL Infrared motion sensor



New Zealand

PO Box 100-707
N.S.M.C
Auckland

Phone +64 (0)9 917 4000
Phone 0800 232 633
info@cdb.co.nz

Australia

PO Box 574
South Morang
Victoria, 3752

Phone +61 (0)3 9365 5100
Phone 1300 465 324
info@cdbgoldair.com.au

Manual